
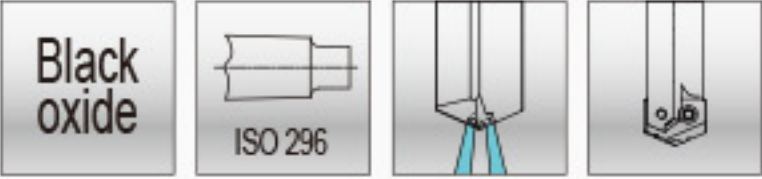


SGS-* -MM STRAIGHT FLUTE HOLDER WITH TAPER SHANK

锥柄直槽铲钻刀杆

- 刀杆内冷却结构, 具有优良的冷却效果与排屑性能;
- 可换刀片接口, 在线更换刀片。
- The inner cooling structure of holder has excellent cooling effect and chip removal performance;
- Interchangeable insert structure can make inserts replacement on the machine tool directly.


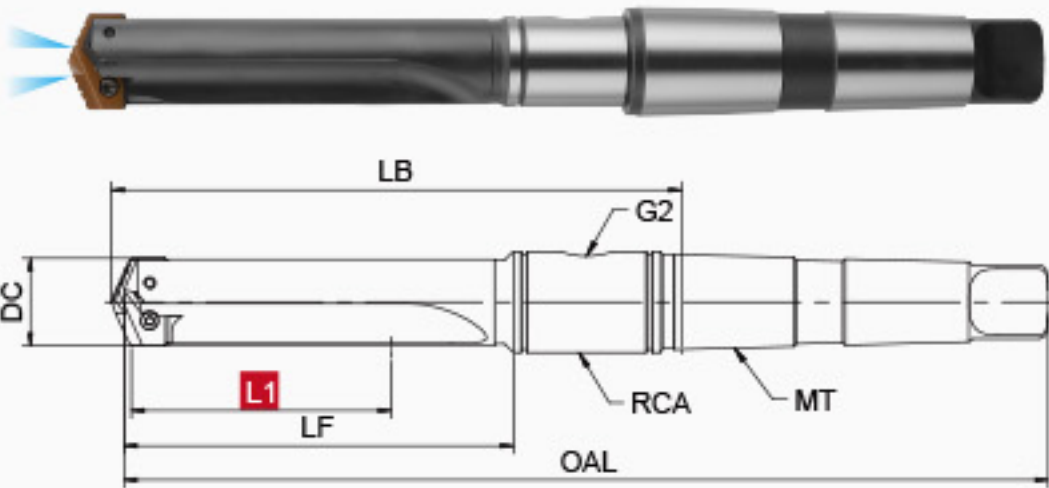


单位(Unit): mm

型号 TYPE	接口 CONNECTOR	匹配刀片直径 DC	尺寸 SIZE						配件 ACCESSORIES			
			L1	LF	LB	OAL	MT	G2 inch	RCA			
SGS-Y0-MMMT2-20N	Y0	9.50 ~ 11.49 0.374"~0.452"	32	52	88	160	2	Rc1/16	SH-1905R	2102047	2502018	
SGS-Y0-MMMT2-45N			86	106	142	214	2	Rc1/16	SH-1905R	2102047	2502018	
SGS-Z0-MMMT2-20N	Z0	11.50 ~ 12.97 0.453"~0.511"	32	52	88	160	2	Rc1/16	SH-1905R	2102048	2502018	
SGS-Z0-MMMT2-45N			86	106	142	214	2	Rc1/16	SH-1905R	2102048	2502018	
SGS-00-MMMT2-20N	00	12.98 ~ 15.49 0.511"~0.61"	35	56	92	164	2	Rc1/16	SH-1905R	2102230	2502017	
SGS-00-MMMT2-45N			89	110	146	218	2	Rc1/16	SH-1905R	2102230	2502017	
SGS-00-MMMT2-60N			178	199	235	307	2	Rc1/16	SH-1905R	2102230	2502017	
SGS-05-MMMT2-20N	05	15.50 ~ 17.85 0.61"~0.703"	35	56	92	164	2	Rc1/16	SH-1905R	2102046	2502017	
SGS-05-MMMT2-45N			89	110	146	218	2	Rc1/16	SH-1905R	2102046	2502017	
SGS-05-MMMT2-60N			178	199	235	307	2	Rc1/16	SH-1905R	2102046	2502017	
SGS-05-MMMT2-70N			295	325	361	433	2	Rc1/16	SH-1905R	2102046	2502017	
SGS-10-MMMT3-20N	10	17.86 ~ 21.99 0.703"~0.866"	70	98	143	233	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-10-MMMT3-45N			219	251	295	385	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-10-MMMT3-60N			363	395	439	529	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-15-MMMT3-20N	15	22.00 ~ 24.60 0.866"~0.969"	70	98	143	233	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-15-MMMT3-45N			219	251	295	385	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-15-MMMT3-60N			363	395	439	529	3	Rc1/8	SH-2540R	2102049	2502016	
SGS-20-MMMT4-20N	20	24.61 ~ 29.99 0.969"~1.181"	86	114	160	274	4	Rc1/8	SH-2540R	2102045	2502020	
SGS-20-MMMT4-45N			238	267	313	426	4	Rc1/8	SH-2540R	2102045	2502020	
SGS-20-MMMT4-60N			400	429	475	588	4	Rc1/8	SH-2540R	2102045	2502020	
SGS-25-MMMT4-20N	25	30.00 ~ 35.50 1.181"~1.398"	86	114	168	281	4	Rc1/4	SH-3175R	2102045	2502020	
SGS-25-MMMT4-45N			238	267	320	433	4	Rc1/4	SH-3175R	2102045	2502020	
SGS-25-MMMT4-60N			400	429	482	595	4	Rc1/4	SH-3175R	2102045	2502020	
SGS-30-MMMT4-20N	30	35.51 ~ 41.99 1.398"~1.653"	121	152	206	319	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-30-MMMT4-45N			260	292	346	459	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-30-MMMT4-50N			349	381	435	548	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-30-MMMT4-70N			559	591	645	757	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-30-MMMT4-90N			787	819	873	986	4	Rc1/4	SH-3175R	2102044	2502015	

SGS-*-MM STRAIGHT FLUTE HOLDER WITH TAPER SHANK 锥柄直槽铲钻刀杆



- 刀杆内冷却结构, 具有优良的冷却效果与排屑性能;
- 可换刀片接口, 在线更换刀片。
- The inner cooling structure of holder has excellent cooling effect and chip removal performance;
- Interchangeable insert structure can make inserts replacement on the machine tool directly.

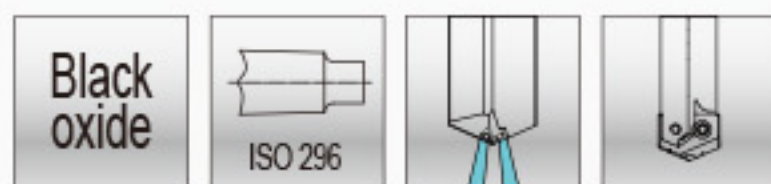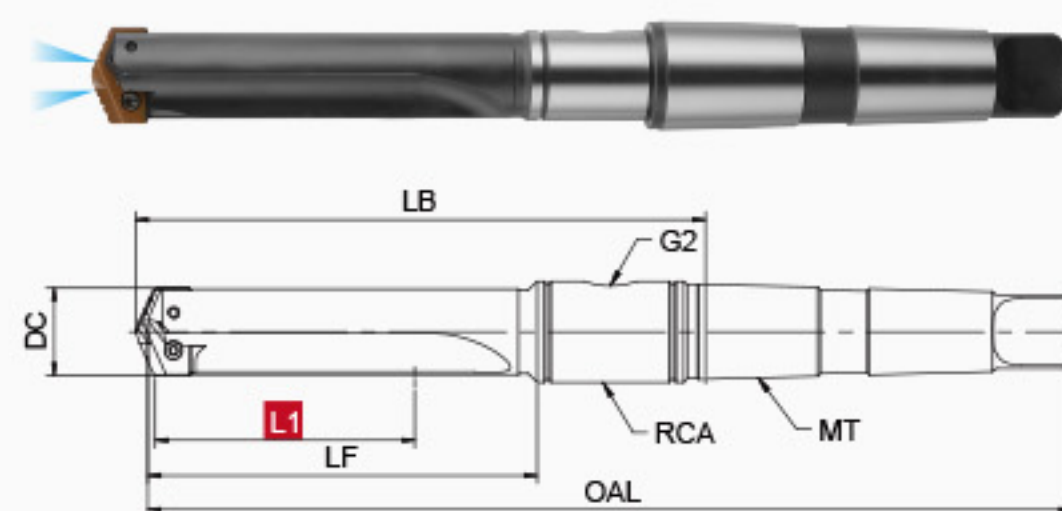

单位(Unit): mm

型号 TYPE	接口 CONNECTOR	匹配刀片直径 DC	尺寸 SIZE						配件 ACCESSORIES			
			L1	LF	LB	OAL	MT	G2 inch	RCA			
SGS-35-MMMT4-20N	35	42.00 ~ 47.99 1.654"~1.899"	121	152	206	319	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-35-MMMT4-45N			260	292	346	459	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-35-MMMT4-50N			349	381	435	548	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-35-MMMT4-70N			559	591	645	757	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-35-MMMT4-90N			787	819	873	986	4	Rc1/4	SH-3175R	2102044	2502015	
SGS-40-MMMT5-20N	40	48.00 ~ 55.99 1.89" - 2.204"	130	165	219	364	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-40-MMMT5-45N			350	385	445	589	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-40-MMMT5-50N			422	457	511	656	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-40-MMMT5-70N			625	660	714	859	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-40-MMMT5-90N			879	914	968	1113	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-45-MMMT5-20N	45	56.00 ~ 65.09 2.205"~2.563"	130	165	219	364	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-45-MMMT5-45N			350	385	445	589	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-45-MMMT5-50N			422	457	511	656	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-45-MMMT5-70N			625	660	714	859	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-45-MMMT5-90N			879	914	968	1113	5	Rc1/4	SH-4445R	2102044	2502015	
SGS-50-MMMT5-20N	50	63.50 ~ 76.99 2.5"~3.031"	172	216	287	430	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-50-MMMT5-45N			368	412	483	626	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-50-MMMT5-50N			464	508	579	722	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-50-MMMT5-70N			660	705	776	919	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-50-MMMT5-90N			889	933	1005	1148	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-55-MMMT5-20N	55	77.00 ~ 89.09 3.031"~3.507"	172	216	287	430	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-55-MMMT5-50N			464	508	579	722	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-55-MMMT5-70N			660	705	776	919	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-55-MMMT5-90N			889	933	1005	1148	5	Rc1/2	SH-5715R	2102043	2502019	

- 刀杆内冷却结构, 具有优良的冷却效果与排屑性能;
- 可换刀片接口, 在线更换刀片。
- The inner cooling structure of holder has excellent cooling effect and chip removal performance;
- Interchangeable insert structure can make inserts replacement on the machine tool directly.

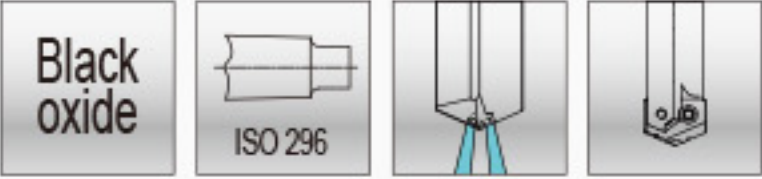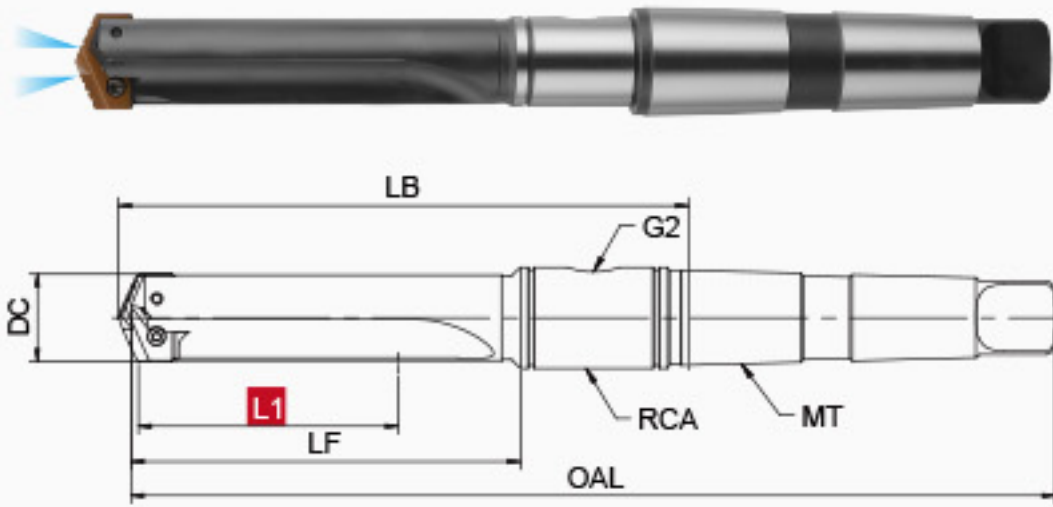

单位(Unit): mm

型号 TYPE	接口 CONNECTOR	匹配刀片直径 DC	尺寸 SIZE						配件 ACCESSORIES			
			L1	LF	LB	OAL	MT	G2 inch	RCA			
SGS-70-MMMT5-20N	70	89.10 ~ 101.60 3.508"~4"	172	225	297	440	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-70-MMMT5-50N			556	610	681	824	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-70-MMMT5-70N			685	740	811	954	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-70-MMMT5-90N			939	994	1065	1208	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-80-MMMT5-20N	80	101.61 ~ 114.30 4"~4.5"	172	225	297	440	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-80-MMMT5-50N			556	610	681	824	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-80-MMMT5-70N			685	740	811	954	5	Rc1/2	SH-5715R	2102043	2502019	
SGS-80-MMMT5-90N			939	994	1065	1208	5	Rc1/2	SH-5715R	2102043	2502019	