


- 重量轻, 操作便捷, 应用广泛
- 高功率, 高效钻孔
- 专利结构, 高精度制造工艺, 使用寿命长
- Light and convenient operation, widely used
- High power and drilling efficiency
- Patented structure, high-precision manufacturing process with long service life

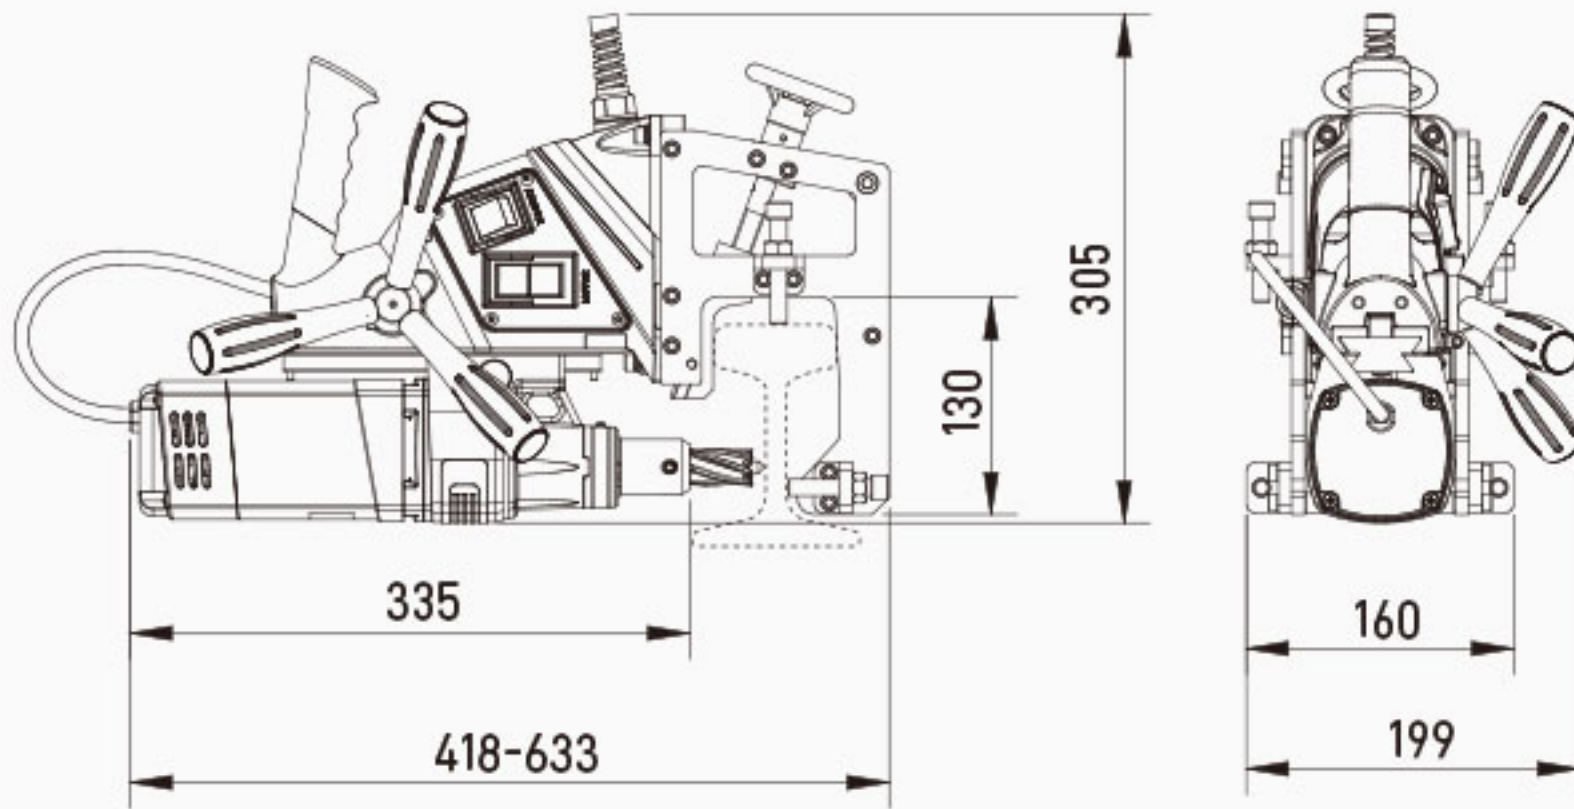

AC220V~240V 50~60HZ

额定输入功率 RATED INPUT POWER	1100W	空心钢轨钻钻孔直径 THE DIAMETER RANGE OF RAIL CUTTER	≤ø35mm	冷却方式 COOLING METHOD	手动压力壶 MANUAL PRESSURE POT
行程 STROKE	120mm	实心钢轨钻钻孔直径 THE DIAMETER RANGE OF SOLID RAIL CUTTER	≤10mm		
电机可调范围 MOTOR ADJUSTABLE RANGE	95mm	钻削钢轨型号 DRILLING RAIL MODEL	43kg/m钢轨, 50kg/m钢轨, 60kg/m钢轨		
主轴接口类型 SPINDLE INTERFACE TYPE	ø19.05mm	攻丝规格 TAPPING SPECIFICATIONS	—		
外形尺寸 MACHINE SIZE	305*199*418(633)mm	重量 WEIGHT	13.5KG		
最小钢板厚度 THE MIN PROCESSING THICKNESS	—	额定转速 RATED SPEED	450rpm		

主要配件: 扳手 / 安全带 MAIN ACCESSORIES: WRENCH / SAFETY STRAP.

AC 110V~127V, 同款机型可选电压
50~60HZ SAME MODEL SELECTABLE VOLTAGE.

可选电源插头类型 OPTIONAL POWER PLUG TYPE

AC 220~240V					AC 110~127V	
英标插头 ENGLAND STANDARD PLUG	澳标插头 AUSTRALIA STANDARD PLUG	欧标插头 EUROP STANDARD PLUG	国标插头 CHINA STANDARD PLUG	工业插头 INDUSTRIAL PLUG	美标插头 AMERICA STANDARD PLUG	工业插头 INDUSTRIAL PLUG

