
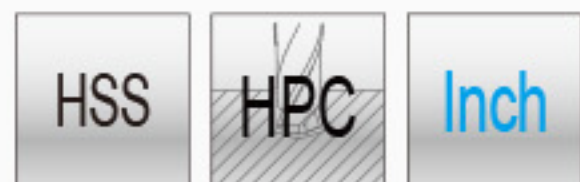


SP-* -25VH HSS INSERT OF SPADE DRILL WITH DOUBLE TOP ANGLE

高速钢双顶角铲钻刀片

- 直径范围:1"~2-11/32";
- 工程机械装夹护板专用刀片;
- HPM25-高速钢,适用于硬度HB400以下的钢材。
- Diameter range: 1"~2-11/32".
- Special blade for armor guard plate of construction machinery.
- HPM25-Powder HSS for steel with hardness below HB400.
-

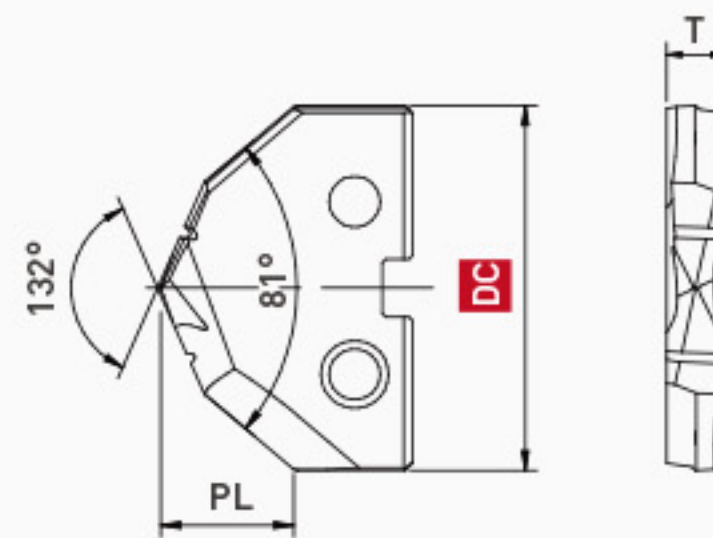

单位(Unit): inch

刀片型号 MODEL	尺寸 SIZE			刀杆接口 CONNECTOR	库存 STOCK
	DC	PL	T		
SP-2-I1000-25VH	1"	25.40	0.366	20	△
SP-2-I1187-25VH	1-3/16"	30.16	0.433	25	▲
SP-2-I1344-25VH	1-11/32"	34.13	0.528	25	▲
SP-3-I1562-25VH	1-9/16"	39.69	0.555	30	△
SP-3-I1750-25VH	1-3/4"	44.45	0.642	35	△
SP-4-I2344-25VH	2-11/32"	59.53	0.858	45	△

▲ 常备库存 △ 按订单生产 ▲ YES △ NO

被加工材料适用表 APPLICABLE TABLE OF PROCESSED MATERIALS

ISO代码	P	P	P	P	M	K	K	N	N	N	S	S	H	H
工件材料 WORKPIECE MATERIAL	低碳钢	结构钢	合金钢	工具钢	不锈钢	铸铁	可锻铸铁	铝合金	铸造铝合金	铜合金	高温合金	钛合金	淬硬钢	淬硬钢
	MILD STEEL	STRUCTURSL STEEL	ALLOR STEEL	TOOL STEEL	STAINLESS STEEL	CASTIRON	MALLEABLE CAST IRON	ALUMINUM ALLOY	CAST ALUMINUM ALLOYS	COPPER ALLOYS	SUPER ALLOYS	TITANIUM ALLOYS	HARDENED STEEL	HARDENED STEEL
	<500N	<750N	<1400N	<1100N	<900N	<750N	<1100N	Si<12%	Si>12%	<750N	<1100N	<1100N	<1400N	<1600N
25VH	●	●	○											

● 非常适合 ○ 适合 ● VERY SUITABLE ○ SUITABLE